





DIN Type
SKD61 equivalent
+
Nitrided

STRAIGHT EJECTOR PINS

—L/L · P DIMENSION SPECIFY TYPE—



D-EPN-L (L Specify)
D-EPNB (L · P Specify)

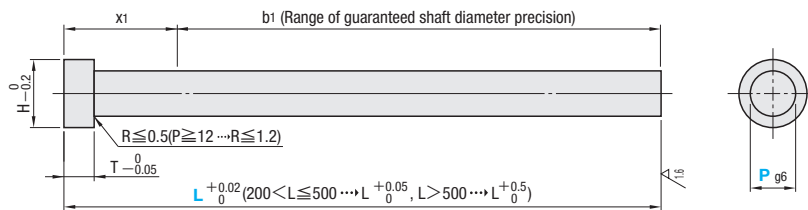

☞ Range of guaranteed shaft diameter precision and hardness (Details **P.61, 63**)

☑ SKD61 equivalent + Nitrided

☒ Surface base: 900HV~
Materials: 40~45HRC

Ejector Pins

L Dimension Specify

| H | T | P g6 | Part No. | | L 0.01mm increments |
|-----|-----|--------|------------------|------------------|------------------------|
| | | | Type | P | |
| 2.5 | 1.2 | -0.002 | D-EPN-L | 1 | 100.00 ~ 200.00 |
| 3 | 1.5 | | | 1.5 | 100.00 ~ 200.00 |
| 4 | 2 | -0.008 | | 2 | 100.00 ~ 315.00 |
| 5 | 2 | 2.5 | | 100.00 ~ 315.00 | |
| 6 | | 3 | | 100.00 ~ 400.00 | |
| 7 | | 3.5 | | 100.00 ~ 400.00 | |
| 8 | 3 | -0.004 | | 4 | 100.00 ~ 500.00 |
| | | -0.012 | | 4.5 | 100.00 ~ 250.00 |
| 10 | | 5 | | 100.00 ~ 400.00 | |
| | | 5.5 | | 100.00 ~ 200.00 | |
| 12 | | 6 | 100.00 ~ 1000.00 | | |
| | | 6.5 | 100.00 ~ 250.00 | | |
| 14 | 5 | -0.005 | 8 | 100.00 ~ 1000.00 | |
| 16 | | -0.014 | 10 | | |
| 18 | 7 | -0.006 | 12 | | |
| 22 | | -0.017 | 16 | | |
| 26 | 8 | -0.007 | 20 | | |
| 32 | 10 | -0.020 | 25 | 100.00 ~ 500.00 | |

L · P Dimension Specify

| H | T | P g6 | Part No. | | L 0.01mm increments | P 0.01mm increments |
|-----|-----|--------|------------------|------------------|------------------------|------------------------|
| | | | Type | No. | | |
| 2.5 | 1.2 | -0.002 | D-EPNB | 1 | 100.00 ~ 200.00 | 0.50 ~ 1.00 |
| 3 | 1.5 | | | 1.5 | 100.00 ~ 200.00 | 1.01 ~ 1.50 |
| 4 | 2 | -0.008 | | 2 | 100.00 ~ 315.00 | 1.51 ~ 2.00 |
| 5 | 2 | 2.5 | | 100.00 ~ 315.00 | 2.01 ~ 2.50 | |
| 6 | | 3 | | 100.00 ~ 400.00 | 2.51 ~ 3.00 | |
| 7 | | 3.5 | | 100.00 ~ 400.00 | 3.01 ~ 3.50 | |
| 8 | 3 | -0.004 | | 4 | 100.00 ~ 500.00 | 3.51 ~ 4.00 |
| | | -0.012 | | 4.5 | 100.00 ~ 250.00 | 4.01 ~ 4.50 |
| 10 | | 5 | | 100.00 ~ 400.00 | 4.51 ~ 5.00 | |
| | | 5.5 | | 100.00 ~ 200.00 | 5.01 ~ 5.50 | |
| 12 | | 6 | 100.00 ~ 1000.00 | 5.51 ~ 6.00 | | |
| | | 6.5 | 100.00 ~ 250.00 | 6.01 ~ 6.50 | | |
| 14 | 5 | -0.005 | 8 | 100.00 ~ 1000.00 | 6.51 ~ 8.00 | |
| 16 | | -0.014 | 10 | | 8.01 ~ 10.00 | |
| 18 | 7 | -0.006 | 12 | | 10.01 ~ 12.00 | |
| 22 | | -0.017 | 16 | | 12.01 ~ 16.00 | |
| 26 | 8 | -0.007 | 20 | 100.00 ~ 500.00 | 16.01 ~ 20.00 | |
| 32 | 10 | -0.020 | 25 | | 20.01 ~ 25.00 | |

Alterations Part No. - L - P - (KC · WKC...etc.)
D-EPNB 4.5 - 248.35 - P4.23 - WKC2.115

Alteration details **P.28**

| Alterations | Code | Spec. |
|-------------|------|---|
| | KC | Single flat cutting P/2 ≤ KC < H/2 (1) To align the key flat with the shaft diameter [Unit of designation] 0.005mm increments possible |
| | WKC | Two flats cutting P/2 ≤ WKC < H/2 (2) To designate arbitrary key flat dimensions [Unit of designation] 0.1mm |

| Alterations | Code | Spec. |
|-------------|------|--|
| | HC | HC=0.1mm increments P+1 ≤ HC < H, P ≥ 1.5 |

Order Part No. - L - P
D-EPN-L 1 - 100.00
D-EPNB 1 - 100.00 - P0.50

Days to Ship **10** Days

Price **Order / Quote:**
WOS: <https://in.misumi-ec.com/>
TEL: +91-124-468-8800 E-mail: cs@misumi.co.in