

# STRAIGHT EJECTOR SLEEVES



—◎0.08 DIMENSIONS SPECIFY TYPE—



Part No.	D or P	D · P Tolerance	V Tolerance	Applicable center pin shaft diameter tolerance
C-ESNJ	D or P ≤ 12.00	-0.01 -0.02	H7	*Please note that the ejector sleeve with a V dimension tolerance of H7 has a long precision fitting portion S and is not suitable for use with a center pin with a shaft diameter tolerance of $-\frac{0.005}{0}$
	D or P > 12.00	-0.01 -0.03		

### VH7 Tolerance

V ≤ 3.0	3.1 ≤ V ≤ 6.0	6.1 ≤ V ≤ 10.0	V ≥ 10.1
+0.010 0	+0.012 0	+0.015 0	+0.018 0

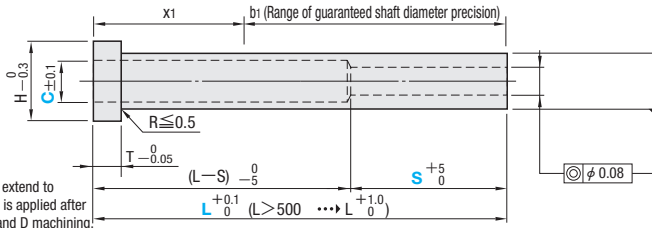

Dimension C remains unchanged

⚠ Nitriding may extend to the head as it is applied after dimension V and D machining.

⚠ When the diameter (D) portion of the stepped center pin is inserted into the relief hole (C), make sure relief hole (C) ≥ pin diameter (D) + 1.0

Range of guaranteed shaft diameter precision (b1=L-x1)  
x1 max.40

SKD61 equivalent + Nitrided  
Surface: 900HV~  
Material: 40±3HRC

### ■ Diameter (D) select type

H	T	Part No. Type	L		V	C	Cmax.	S	
			D	0.01mm increments					0.1mm increments
8	6	C-ESNJ	4	40.00~200.00	-	1.5~ 2.5	C ≥ V + 0.5	3.0	20~100 ⚠ D4, D4.5 When V1.5~V1.9 20~40
			4.5	40.00~250.00		2.0~ 3.0		3.5	
			5	40.00~300.00		2.0~ 3.5		4.0	
			6	40.00~500.00		2.0~ 4.0		4.5	
			6.5			2.5~ 4.5		5.0	
7	2.5~ 5.0		5.5						
7.5	70.00~500.00		2.5~ 5.0	6.0					
8			2.5~ 5.5	6.0					
9			2.5~ 6.5	7.0					
10			4.0~ 7.5	8.0					
12		4.0~ 8.5	9.0						
15		5.0~ 10.5	11.0						
16		5.0~ 11.5	12.0						
20		7.0~ 16.0	17.0						
25	100.00~500.00	500.1~800.0	7.0~16.0	20~100 (L-S) ≥ 50					



Order

Part No.  - L - V - C - S  
C-ESNJ 8 - 200.05 - V4.5 - C5.0 - S32



Days to Ship

**10** Days



Price

Order / Quote:  
WOS: <https://in.misumi-ec.com/>  
TEL: +91-124-468-8800 E-mail: cs@misumi.co.in



Alterations

Part No.  - L - V - C - S - (KC · WKC...etc.)  
C-ESNJ 8 - 200.05 - V4.0 - C5.0 - S32 - KC4.5

Alteration details P.68

