




—OIL GROOVE / STEP TYPE—



D—GPM03

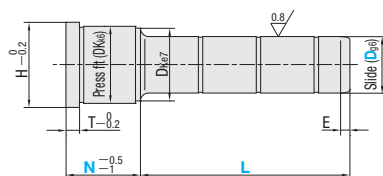

M Tool steel
H 56 HRC~

| Press Fit Part | | | E | T | H | Part No. | | N | | | | | | | |
|--------------------------------|------------------|------------------|----|----|----|----------|--|------------------|------------------|---|---|----|----|--|----|
| DK | k6 | e7 | | | | Type | Slide Part D | | L | | | | | | |
| 14 | +0.012 +0.001 | −0.032 −0.050 | 4 | 3 | 16 | 9 | 20 35 50 | 9 | | | | | | | |
| | | | | | | | 25 45 65 | 12 | | | | | | | |
| | | | | | | | 20 30 | 17 | | | | | | | |
| | | | | | | | 25 35 55 | 22 | | | | | | | |
| | | | | | | | 30 50 | 27 | | | | | | | |
| | | | | | | | 25 45 | 36 | | | | | | | |
| | | | | | | | 30 45 75 | 46 | | | | | | | |
| | | | | | | | 35 60 | 56 | | | | | | | |
| | | | | | | | 45 | 66 | | | | | | | |
| 20 | +0.012 +0.001 | −0.032 −0.050 | 4 | 3 | 25 | 14 | 35 55 75 95 | 17 | | | | | | | |
| | | | | | | | 20 35 40 45 50 55 65 70 90 110 | 22 | | | | | | | |
| | | | | | | | 20 35 40 45 55 65 85 105 | 22 | | | | | | | |
| | | | | | | | 20 35 40 45 55 65 75 95 | 36 | | | | | | | |
| | | | | | | | 20 35 45 65 85 105 | 46 | | | | | | | |
| | | | | | | | 20 35 55 75 95 | 56 | | | | | | | |
| | | | | | | | 55 65 95 | 66 | | | | | | | |
| | | | | | | | 55 95 | 76 | | | | | | | |
| | | | | | | | 55 95 | 86 | | | | | | | |
| | | | | | | | 55 95 | 96 | | | | | | | |
| | | | | | | | 75 | 116 | | | | | | | |
| | | | | | | | 26 | +0.015 +0.002 | −0.040 −0.061 | 7 | 6 | 31 | 18 | 35 55 75 95 | 17 |
| | | | | | | | | | | | | | | 20 35 40 45 50 55 60 65 70 80 85 115 | 22 |
| | | | | | | | | | | | | | | 20 35 40 45 50 55 60 65 70 80 85 105 125 155 | 27 |
| | | | | | | | | | | | | | | 20 *35 *40 45 50 55 60 *65 *70 75 80 *95 115 135 155 | 36 |
| 20 *45 *65 *85 *105 135 165 | 46 | | | | | | | | | | | | | | |
| 20 *35 *55 75 95 | 56 | | | | | | | | | | | | | | |
| *55 *75 *95 | 66 | | | | | | | | | | | | | | |
| *55 75 *95 | 76 | | | | | | | | | | | | | | |
| 55 75 95 | 86 | | | | | | | | | | | | | | |
| 55 95 | 96 | | | | | | | | | | | | | | |
| 115 | 116 | | | | | | | | | | | | | | |
| 135 | 136 | | | | | | | | | | | | | | |
| 17 | 176 | | | | | | | | | | | | | | |
| 30 | +0.018 +0.002 | −0.050 −0.075 | 7 | 6 | 35 | 22 | | | | | | | | 35 55 75 | 22 |
| | | | | | | | | | | | | | | 35 55 75 105 130 | 27 |
| | | | | | | | 25 45 50 60 65 70 80 85 105 125 165 | 36 | | | | | | | |
| | | | | | | | 25 *45 *50 *55 *60 70 *75 80 *95 *115 135 *165 195 | 46 | | | | | | | |
| | | | | | | | 25 *45 *50 60 *65 70 80 *85 *105 115 125 *165 195 | 56 | | | | | | | |
| | | | | | | | 25 *45 *55 *75 *95 *115 *165 195 | 66 | | | | | | | |
| | | | | | | | *55 *75 *95 | 76 | | | | | | | |
| | | | | | | | 25 *45 *55 *75 *95 115 | 86 | | | | | | | |
| | | | | | | | *55 *75 *95 | 96 | | | | | | | |
| | | | | | | | 55 75 *95 115 135 155 | 116 | | | | | | | |
| | | | | | | | 75 115 155 | 136 | | | | | | | |
| | | | | | | | 135 | 156 | | | | | | | |
| | | | | | | | 155 | 22 | | | | | | | |
| | | | | | | | 42 | +0.018 +0.002 | −0.050 −0.075 | 7 | 6 | 47 | 30 | 35 75 130 | 27 |
| | | | | | | | | | | | | | | 45 65 105 165 | 36 |
| *55 *75 *95 *115 *155 | 46 | | | | | | | | | | | | | | |
| *45 *65 85 105 *125 *165 195 | 56 | | | | | | | | | | | | | | |
| *55 *75 *95 *115 *135 *175 195 | 66 | | | | | | | | | | | | | | |
| *55 *75 *95 *115 135 *175 195 | 76 | | | | | | | | | | | | | | |
| 55 *75 95 115 *155 195 | 86 | | | | | | | | | | | | | | |
| *55 *75 95 *115 155 | 96 | | | | | | | | | | | | | | |
| *55 75 *95 115 155 195 | 116 | | | | | | | | | | | | | | |
| 75 95 115 155 | 136 | | | | | | | | | | | | | | |
| 95 115 155 | 156 | | | | | | | | | | | | | | |
| 115 155 | 176 | | | | | | | | | | | | | | |
| 135 175 | 196 | | | | | | | | | | | | | | |
| 155 195 | 36 | | | | | | | | | | | | | | |
| 54 | +0.021 +0.002 | −0.060 −0.090 | 10 | 10 | 60 | 40 | | | | | | | | 75 *135 | 46 |
| | | | | | | | 95 165 | 56 | | | | | | | |
| | | | | | | | *75 115 *155 195 | 66 | | | | | | | |
| | | | | | | | *75 *135 | 76 | | | | | | | |
| | | | | | | | 75 *115 *175 | 86 | | | | | | | |
| | | | | | | | 75 *135 | 96 | | | | | | | |
| | | | | | | | 75 115 155 | 116 | | | | | | | |
| | | | | | | | 95 115 135 195 | 136 | | | | | | | |
| | | | | | | | 95 115 135 215 | 156 | | | | | | | |
| | | | | | | | 115 155 195 215 | 176 | | | | | | | |
| | | | | | | | 135 155 175 | 196 | | | | | | | |
| | | | | | | | 155 195 235 | 76 | | | | | | | |
| | | | | | | | 115 135 155 175 195 | 96 | | | | | | | |
| | | | | | | | 115 155 175 195 | 116 | | | | | | | |
| | | | | | | | 135 155 175 195 | 136 | | | | | | | |
| 155 175 195 215 | 156 | | | | | | | | | | | | | | |
| 175 195 215 245 | 196 | | | | | | | | | | | | | | |
| 195 215 245 | 246 | | | | | | | | | | | | | | |
| 66 | +0.021 +0.002 | −0.060 −0.090 | 10 | 72 | 86 | 50 | 115 | 96 | | | | | | | |
| | | | | | | | 135 | 116 | | | | | | | |
| | | | | | | | 135 | 136 | | | | | | | |
| | | | | | | | 155 | 156 | | | | | | | |
| | | | | | | | 175 | 196 | | | | | | | |
| 80 | +0.021 +0.002 | −0.060 −0.090 | 10 | 72 | 86 | 60 | 195 | 246 | | | | | | | |
| | | | | | | | 115 | 96 | | | | | | | |
| | | | | | | | 135 | 116 | | | | | | | |
| | | | | | | | 135 | 136 | | | | | | | |
| | | | | | | | 155 | 156 | | | | | | | |

| | 9 ~ 10 | 14 ~ 18 | 20 ~ 30 | 32 ~ 42 | 50 ~ 60 |
|-------------------|------------------|------------------|------------------|------------------|------------------|
| Slide Part Dg6 | -0.005 -0.014 | -0.006 -0.017 | -0.007 -0.020 | -0.009 -0.025 | -0.010 -0.029 |



Order

Part No. — D — L — N
D—GPM03 — 18 — 20 — 36

Days
to Sh

•

Stock

without *

15

Day



Price

Order / Quote:

WOS: <https://in.misumi-ec.com/>

TEL:+91-124-468-8800 E-mail:cs@misumi.co.in

Guide Components