


STRAIGHT PIN SETS

—STANDARD FIXING TYPE—



Installation bolt size	M	ℓ	V	ℓ1	R1	R2	F	L	S (Effective holding amount)	Part No.		E
										Type	D	
M 4	4	10	5	1.0	0.5	0.8	5	14.5	4.5	C—TPNF (①+②Set)	10	7
			7				11	24.5	10.5		13	7
			10				5	14.5	4.5		16	7
M 5	5	12	13				11	24.5	10.5		13	13
			16				6	14.5	5.5		20	8
			20				9	19.5	8.5		11	16
M 6	6	16	16				14	29	12.0		25	11
			20				9	19.5	8.5		13	13
			25				11	24.5	10.5		20	20
M 8	8	20	20				18	34	16.0		25	13
			25				23	39	21.0		30	20
			30								25	25

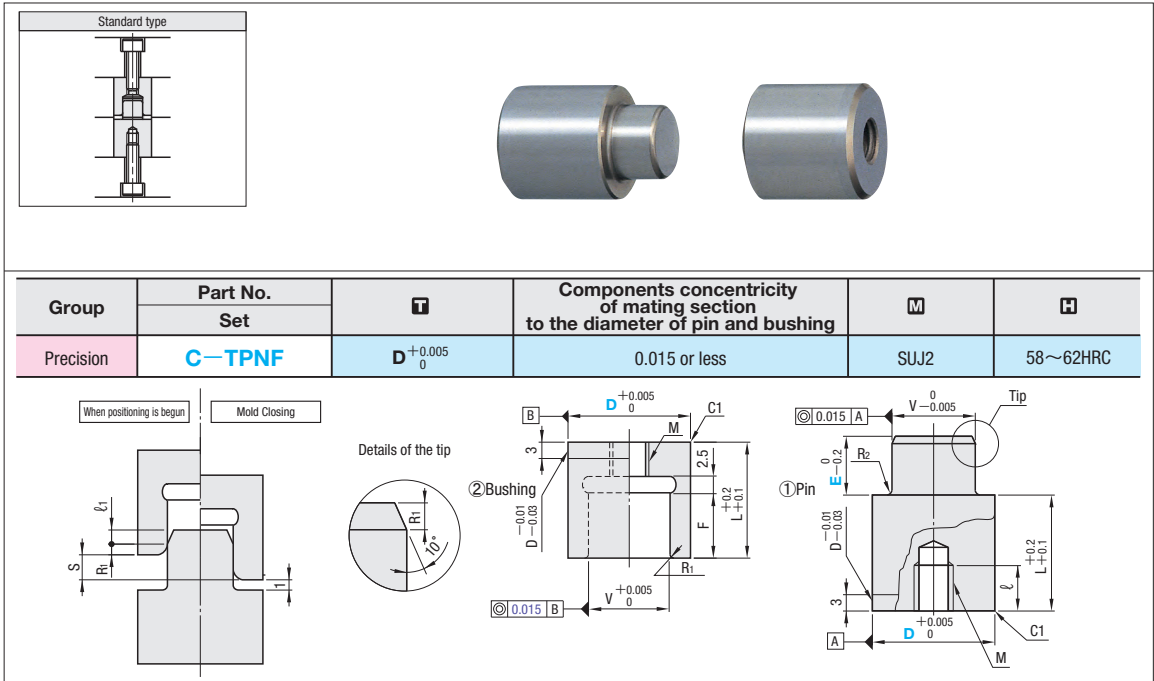

Order

Part No. — E
C—TPNF 13 — 7



Days
to Ship

Stock



Price

Order / Quote:
WOS: <https://in.misumi-ec.com/>
TEL:+91-124-468-8800 E-mail:cs@misumi.co.in

■ Features

- Suitable for positioning in precision molds such as connector and electronic device.
- It is capable of preventing wear and damage in core pins, since it can be positioned before core is inlaid on cavity.
- For the PL installation type, installation and removal can be performed along the parting line for easy maintenance.

■ Usage

- Contacting the pin and bushing when mold is closed may cause damage. Please leave a clearance of about 1mm on PL.
- Use precision leader pins since clearance is fairly small.

