


STRAIGHT BLOCK SETS

— PL SIDE FIXING TYPE —



Group	Part No.	V Tolerance		Positioning precision (Clearance)	V dimension symmetry against A/B plane	M	H
		① Pin	② Bushing				
Standard	C-TTSBZ	0 -0.010	+0.010 +0.005	0.005~0.020	0.008 or less	YK30 equivalent	56HRC~

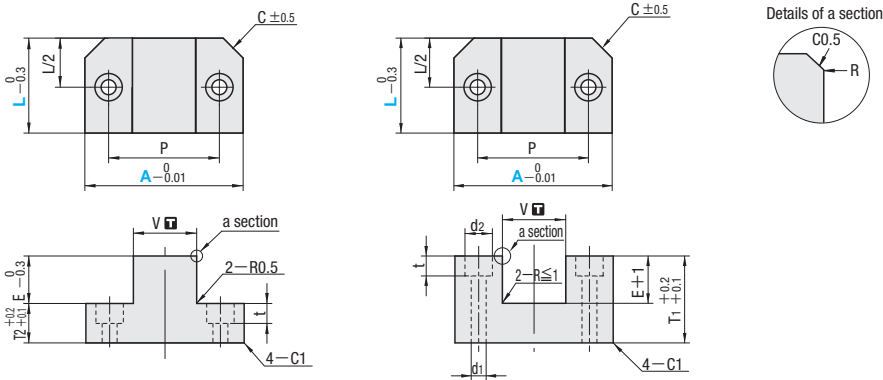

Part No.		L	T ₁	T ₂	V	E	Installation bolts	d ₁	d ₂	t	P	C
Type	A											
C-TTSBZ	50	25	25	20	17	10	M6	7	11	8	34	5
	75	50	30	25	30	15	M8	9	14	8	52	8



Order

Part No. — L
C-TTSBZ 50 — 25



Days to Ship

Stock



Price

Order / Quote:
WOS: <https://in.misumi-ec.com/>
TEL: +91-124-468-8800 E-mail: cs@misumi.co.in

Usage

- When a convex side and a concave side knock against each other, it causes damage. Please make a 1mm gap and use it.

E	S
Effective length max.	
10	7.5
15	9.5

