



RETURN PINS

—LENGTH SPECIFY WITH TAP HOLE—



Components of Ejector Space

Type	Head thickness (T)	Squareness of the head
C—RP4TLM	4mm	
C—RP8TLM	8mm	

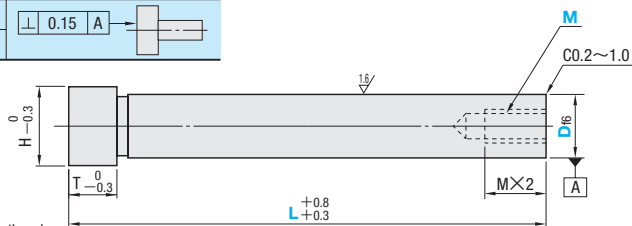

⊕ A center hole may remain on one or both ends.

M 20Cr
 56HRC~
 (Depth 0.8 mm or more)

H	D16		Part No.		L	M			
			Type	D					
11	8	-0.013	C—RP4TLM	Head thickness 4mm	8	35.0~250.0	4		
15		-0.022			10	35.0~300.0	4 · 5		
17	12	-0.016			12	35.0~300.0			
18					13	-0.027	13	35.0~300.0	5 · 6
20							15	35.0~350.0	
21	16	-0.020			16	35.0~350.0	6 · 8		
25					20	50.0~400.0			
30	25	-0.033			25	50.0~450.0	6 · 8 · 10 · 12		
35					30	50.0~450.0			
15					10	-0.013		10	35.0~300.0
17	12	-0.022					12	35.0~300.0	
18					13	-0.016	13	35.0~300.0	5 · 6
20							15	-0.027	
21	16	-0.020			16	35.0~350.0			6 · 8
25					20	-0.033	20	50.0~500.0	
30	25	50.0~500.0							
35	30	50.0~500.0							
40	35	-0.025	35	100.0~500.0	8 · 10 · 12 · 16				
45			40	-0.041		40	100.0~500.0		
55	50	100.0~500.0							



Order

Part No. — L — M
C—RP4TLM 20 — 199.0 — M8



Days to Ship

12 Days



Price

Order / Quote:
 WOS: <https://in.misumi-ec.com/>
 TEL: +91-124-468-8800 E-mail: cs@misumi.co.in




Alterations

Part No. — L — M — (SC)
C—RP4TLM 30 — 200.0 — M8 — SC



Example

A return pin with a tap hole can be fixed with a bolt when assembling or performing maintenance on the die



Alteration	Code	Spec.																										
	SC	Adds two parallel flats on the head as shown in the figure (Spanner groove width alteration)																										
		<table border="1"> <tr> <td>D</td> <td>8</td> <td>10</td> <td>12</td> <td>13</td> <td>15</td> <td>16</td> <td>20</td> <td>25</td> <td>30</td> <td>35</td> <td>40</td> <td>50</td> </tr> <tr> <td>B</td> <td>8</td> <td>10</td> <td>13</td> <td>13</td> <td>17</td> <td>17</td> <td>22</td> <td>27</td> <td>32</td> <td>35</td> <td>40</td> <td>50</td> </tr> </table>	D	8	10	12	13	15	16	20	25	30	35	40	50	B	8	10	13	13	17	17	22	27	32	35	40	50
D	8	10	12	13	15	16	20	25	30	35	40	50																
B	8	10	13	13	17	17	22	27	32	35	40	50																